


IL7101N

EARTH LEAKAGE CURRENT DETECTOR

Description

The IL7101N is designed for use in earth leakage circuit interrupters for operation directly off the AC Line in breakers.

It contains pre regulator, main regulator, after regulator, differential amplifier, level comparator, latch circuit. The input in the differential amplifier is connect to the secondary node of zero current transformer. The level comparator generates high level when earth leakage current is greater than some level.




N SUFFIX
PLASTIC

Feature

- Low Power Consumption ($P_D=5\text{mW}$) 100V/200V
- 100V/200V Common Built-in Voltage Regulator
- High Gain Differential Amplifier
- High Input Sensitivity
- Minimum External Parts
- Large Surge Margin
- Wide Operating Temperature Range ($T_A=-30$ to 85°C)
- High Noise Immunity


PIN CONFIGURATION

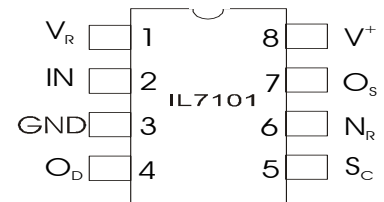

Absolute Maximum Ratings ($T_A=25^\circ\text{c}$)

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	20	V
I_{CC}	Supply Current	8	mA
P	Power Dissipation	200	mW
T_{OP}	Operating Temperature	- 30 to 85	$^\circ\text{C}$
T_{STG}	Storage Temperature	- 55 to 125	$^\circ\text{C}$

Block Diagram

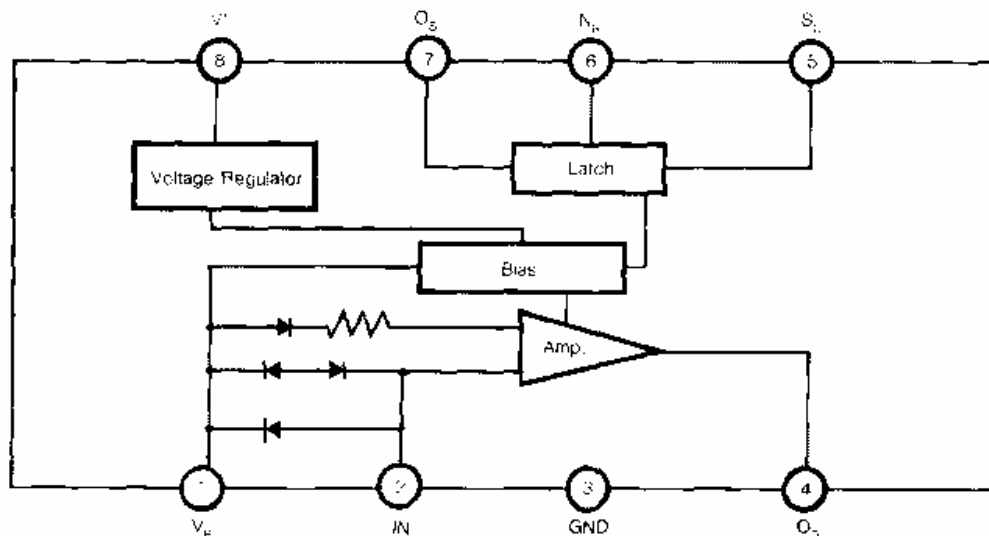

IL7101N

Recommended Operating Condition: $T_A = -30^{\circ}\text{C}$ to 80°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX	UNIT
Supply Voltage	V^+	12			V
Vs-GND Capacitor	C_{vs}	1			μF
O _S -GND Capacitor	C_{os}			1	μF


Electrical Characteristics

PARAMETER	SYMBOL	CONDITIONS	TEMP. (°C)	MIN.	TYP.	MAX.	UNIT
Supply Current 1	I_{S1}	$V^+ = 12\text{V}$, $V_R - V_I = 30\text{ mV}$	-30	-	-	580	μA
			25	-	400	530	
			85	-	-	480	
* Trip Voltage	V_T	$V^+ = 16\text{V}$, $V_R - V_I = X$	-30 85	9	13.5	18	mV (rms)
Differential Amplifier Output Current 1	I_{TD1}	$V^+ = 16\text{ V}$, $V_R - V_I = 30\text{ mV}$ $V_{OD} = 1.2\text{ V}$	25	-12	-	-30	μA
Differential Amplifier Output current 2	I_{TD2}	$V^+ = 16\text{ V}$, $V_R - V_I = \text{short}$ $V_{OD} = 0.8\text{ V}$	25	17	-	37	μA
Output Current	I_O	$V_{SC} = 1.4\text{ V}$ $V_{OS} = 0.8\text{ V}$	$I_{S1} = 580\mu\text{A}$	-30	-200	-	μA
			$I_{S1} = 530\mu\text{A}$	25	-100	-	
			$I_{S1} = 480\mu\text{A}$	85	-75	-	
S _C ON Voltage	$V_{SC\ ON}$	$V^+ = 16\text{ V}$	25	0.7	-	1.4	V
S _C Input Current	$I_{SC\ ON}$	$V^+ = 12\text{V}$	25	-	-	5	μA
Output Current "L"	I_{OSL}	$V^+ = 12\text{ V}$, $V_{OSL} = 0.2\text{ V}$	-30 85	200	-	-	μA
Input Clamp Voltage	V_{IC}	$V^+ = 12\text{ V}$, $I_{IC} = 20\text{ mA}$	-30 85	4.3	-	6.7	V
Differential Input Clamp Voltage	V_{IDC}	$I_{IDC} = 100\text{mA}$	-30 85	0.4	-	2	V
Max. Current Voltage	V_{SM}	$I_{SM} = 7\text{ mA}$	25	20	-	28	V
Supply Current 2	I_{S2}	$V_{OS} = 0.5\text{ V}$, $V_R - V_I = X$	-30 85	-	-	1200	μA
Latch Circuit Off Supply Voltage	V+ OFF		25	0.5			V
Response Time	T_{ON}	$V^+ = 16\text{ V}$, $V_R - V_I = 0.3\text{ V}$	25	1	-	4	ms


* A: 9~12.5 B: 11.5~15.5 C: 14.5~18

Typical Performance Curves


VOLTAGE-SUPPLY VOLTAGE

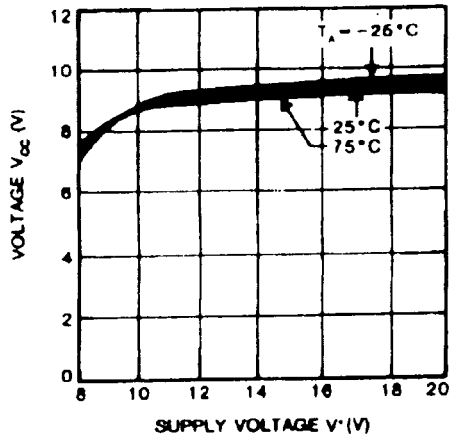


SUPPLY CURRENT-SUPPLY VOLTAGE

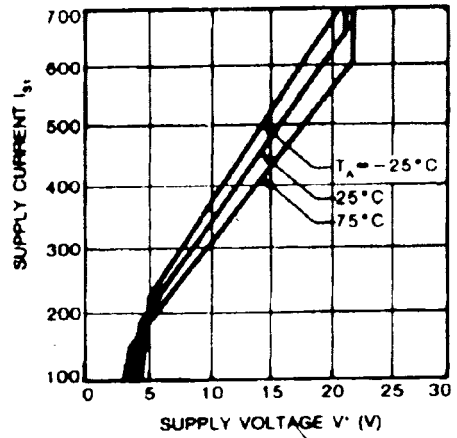


REFERENCE VOLTAGE-SUPPLY VOLTAGE

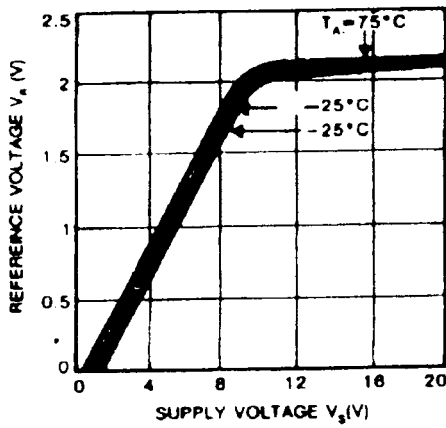


BIAS CURRENT-TEMPERATURE

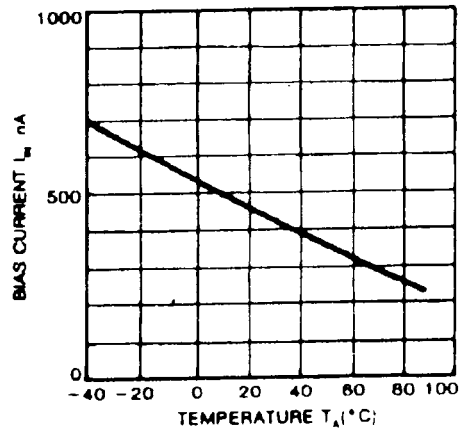

DIFFERENTIAL AMPLIFIER OUTPUT VOLTAGE-DIFFERENTIAL INPUT VOLTAGE

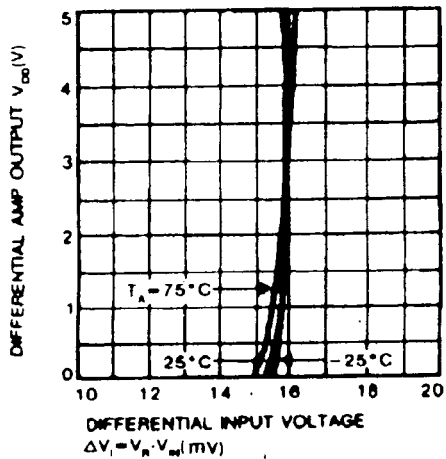

DIFFERENTIAL AMPLIFIER OUTPUT CURRENT-TEMP

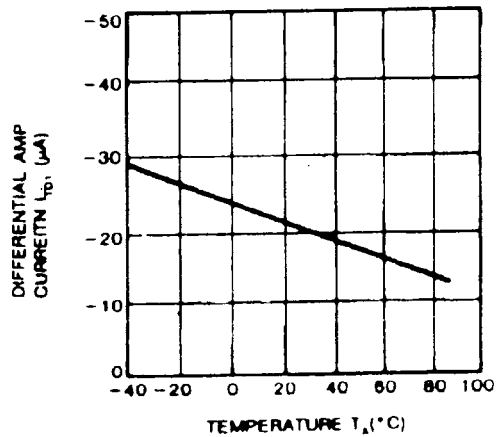

IL7101N

Typical Application

