

IN74VHCT244D

OCTAL BUFFER /LINE DRIVER NINV (3-STATE)


IN74VHCT244D is high-speed logic IC made by CMOS technology and designed for use in high-performance calculating systems with a wide supply voltage range.

As for operation speed, IN74VHCT244D can be compared with equivalent bipolar ICs based on Schottky TTL and two times surpasses ICs of IN74HC series.

IN74VHCT244D tolerates operation under conditions when voltage on input & output is exceeded up to 7V without affecting characteristics and IC reliability. This possibility allows to use IN74VHCT244D in radio-electronic devices for interfacing with supply voltages 5V and 3V, eliminate IC failure under supply voltage source emergency outage.

Use of output edge shaping block in the microcircuit allows to reduce noise amplitude of noises when switching outputs into the same state simultaneously.

Input levels of IN74VHCT244D are compatible with TTL level and output levels with CMOS levels.

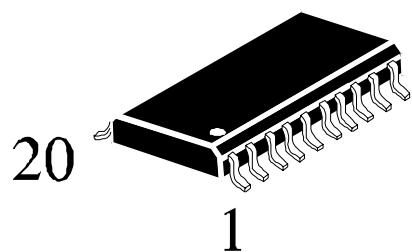

Features:

- Supply voltage range 4.5 to 5.5 V.
- Output current 8 mA.
- Low consumption current: 0.2 mA (typical value) at $T_a = 25^\circ\text{C}$.
- Latchup current not less than 300 mA at $T_a = 85^\circ\text{C}$.
- Tolerable value of static potential not less than 2000 V as per human body model (HBM) and not less than 200 V as per machine model (MM).
- Ambient operation temperature minus 40 to plus 85°C .
- Balanced signal propagation delay.
- Ensures voltage exceeding mode on input
- Low noise level at the simultaneous switching of outputs in the same state: $V_{OLP} = 0.8 \text{ V (max)}$.
- For pins and functions, compatible with IN74HCT244.

IN74VHCT244D


IN74VHCT244D truth table

Input		Output
\bar{G}	A	Y
L	L	L
L	H	H
H	X	Z

Note -

H - high voltage level;
L - low voltage level;
X - any voltage level (low or high);
Z - output in third state

Pins description in IN74VHC241D

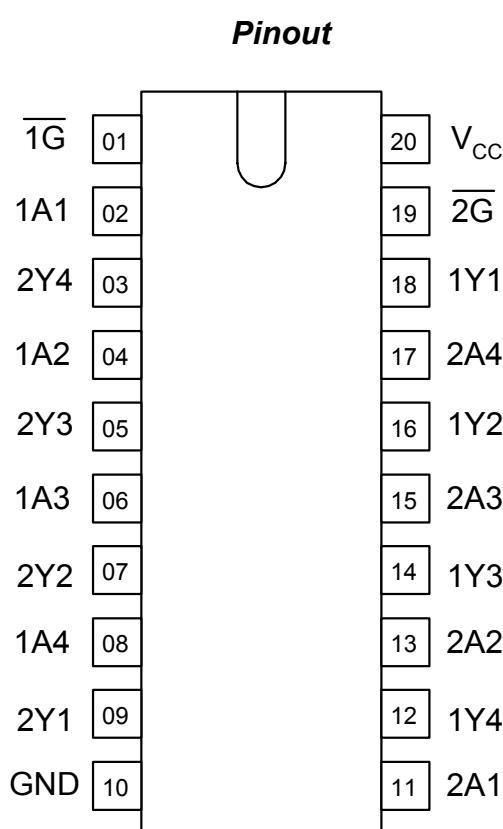

Pin No.	Symbol	Description
01	$\bar{1}G$	Input OUTPUT ENABLE
02	1A1	Data input
03	2Y4	Data output
04	1A2	Data input
05	2Y3	Data output
06	1A3	Data input
07	2Y2	Data output
08	1A4	Data input
09	2Y1	Data output
10	GND	Common output
11	2A1	Data input
12	1Y4	Data output
13	2A2	Data input
14	1Y3	Data output
15	2A3	Data input
16	1Y2	Data output
17	2A4	Data input
18	1Y1	Data output
19	$\bar{2}G$	Input OUTPUT ENABLE
20	VCC	Supply output from voltage source

IN74VHCT244D

Absolute maximum conditions*

Parameter, unit	Symbol	Value	
		min	max
Supply voltage, V	V _{CC}	-0.5	7.0
Input voltage, V	V _{in}	-0.5	7.0
Output voltage, V	V _{out}	-0.5	V _{CC} + 0.5B
Output voltage, V	V _{out1}	-0.5	7.0
Input diode current, mA	I _{ik}	-	-20
Current of common output and supply output, mA	I _{cc}		±75
Output current, mA	I _{out}		±25
Output diode current, mA	I _{ok}		±20
Dissipated power, mW	P _d		180

*Under absolute maximum conditions operation of microcircuit is not guaranteed.
Operation is guaranteed under maximum conditions

Maximum conditions

Parameter, unit	Symbol	Value	
		min	max
Supply voltage, V	V _{CC}	4.5	5.5
Input voltage, V	V _{in}	0	V _{CC}
Output voltage, V	V _{out}	0	V _{CC}
Output voltage, V	V _{out1}	0	5.5*
Output current, mA	I _{out}	-	±8.0
Input rise and fall time, ns/V	t _{LH} , t _{HL}	0	20

* - Outputs in the third state

IN74VHCT244D

DC electrical characteristics

Symbol	Parameter	Test conditions	V_{CC} , V	Value				Unit	
				25 °C		-40 to 85 °C			
				min	max	min	max		
V_{IH}	High input voltage	$V_O \leq 0.1 \text{ V}$ or $V_O \geq V_{CC} - 0.1$	4.5 – 5.5	2.0	-	2.0	-	V	
V_{IL}	Low input voltage	$V_O \leq 0.1 \text{ V}$ or $V_O \geq V_{CC} - 0.1$	4.5 – 5.5	-	0.8	-	0.8		
V_{OH}	High output voltage	$V_I = V_{IH}$ or V_{IL} $I_O = -50 \text{ mA}$	4.5	4.42	-	4.4	-		
			5.5	5.42	-	5.4	-		
		$V_I = V_{IH}$ or V_{IL} ; $I_O = -8 \text{ mA}$	4.5	3.94	-	3.80	-		
V_{OL}	Low output voltage	$V_I = V_{IH}$ or V_{IL} $I_O = 50 \text{ mA}$	4.5	-	0.09	-	0.1		
			5.5	-	0.09	-	0.1		
		$V_I = V_{IH}$ or V_{IL} $I_O = 8 \text{ mA}$	4.5	-	0.36	-	0.44		
I_{OZ}	Output current in "off" state	$V_I = 2.0\text{V}$ $V_O = V_{CC}$ or 0V	5.5	-	± 0.25	-	± 2.5		
I_I	Input current	$V_I = 0 \text{ V}$ or V_{CC}	5.5		± 0.1		± 1.0		
I_{IH1}	High level input current	$V_I = 5.5\text{V}$	0	-	± 0.1	-	± 1.0		
I_{CC}	Consumption current	$V_I = V_{CC}$ or 0V	5.5	-	4.0	-	40.0		
I_{CCT}	TTL-input consumption current	$V_I = 3.4 \text{ V}$	5.5	-	1.35	-	1.5	mA	

IN74VHCT244D

AC electrical characteristics ($t_{LH} = t_{HL} = 3.0 \text{ ns}$)

Symbol	Parameter	Test conditions	V_{CC}, V	C_L, pF	Value				Unit	
					25 °C		-40 to 85 °C			
					min	max	min	max		
t_{PHL}, t_{PLH}	Propagation delay time when switching "on", "off"	Fig 1	5.0 ± 0.5	15	-	7.4	-	8.5	ns	
				50	-	8.4	-	9.5		
t_{PHZ}, t_{PLZ}	Propagation delay time under transition from high, low level into "off" state	Fig 2	5.0 ± 0.5	50	-	11.4	-	13.0	ns	
t_{PZH}, t_{PZL}	Propagation delay time under transition from «off» state into high, low level	Fig 2	5.0 ± 0.5	15	-	10.4	-	12.0	ns	
				50	-	11.4	-	13.0		
t_{OSLH}, t_{OSHL}	Propagation delays difference between outputs	-	5.0 ± 0.5	50	-	1.0	-	1.0	ns	

Capacitance characteristics

Symbol	Parameter	Test conditions	V_{CC}, V	Value		Unit	
				25 °C			
				min	max		
C_I	Input capacity	-	5.0		10	pF	
C_O	Output capacity	-	5.0		18	pF	
C_{PD}	Dynamic capacity	$V_I = 0 \text{ V or } V_{CC}$	5.0		36	pF	

Noise characteristics ($C_L = 50 \text{ pF}$)

Symbol	Parameter	V_{CC}, V	Value		Unit
			min	max	
V_{OLP}	Positive noise of low output voltage	5.0	-	1.1	V
V_{OLV}	Negative noise of low output voltage	5.0	-1.1	-	
V_{IHD}	Input dynamic high voltage	5.0	2.0		
V_{ILD}	Input dynamic low voltage	5.0		0.8	



- - Time diagram of input and output pulses

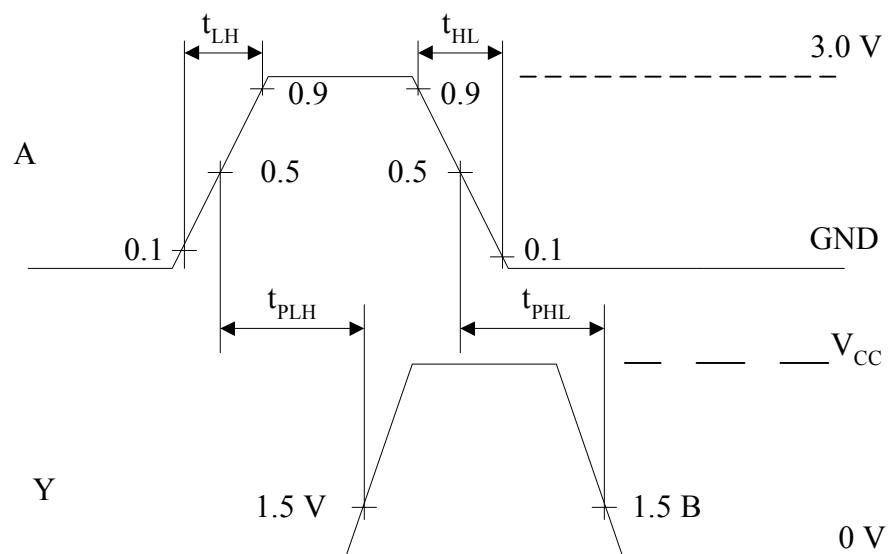


Fig. 1


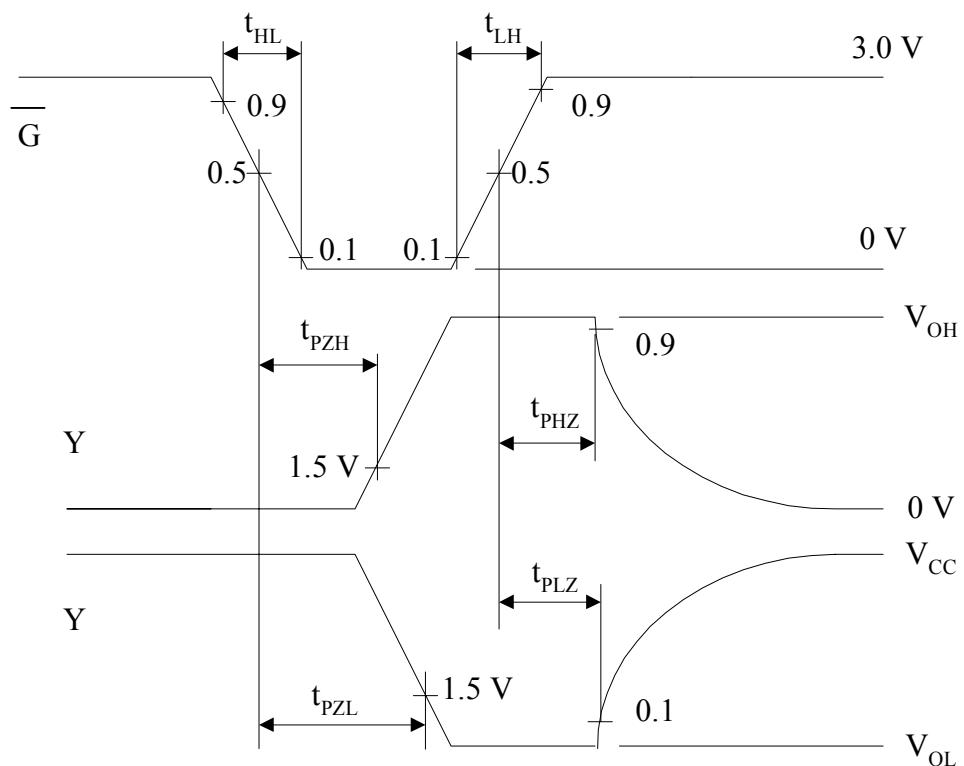


Fig. 2

MS-013AC Package dimensions

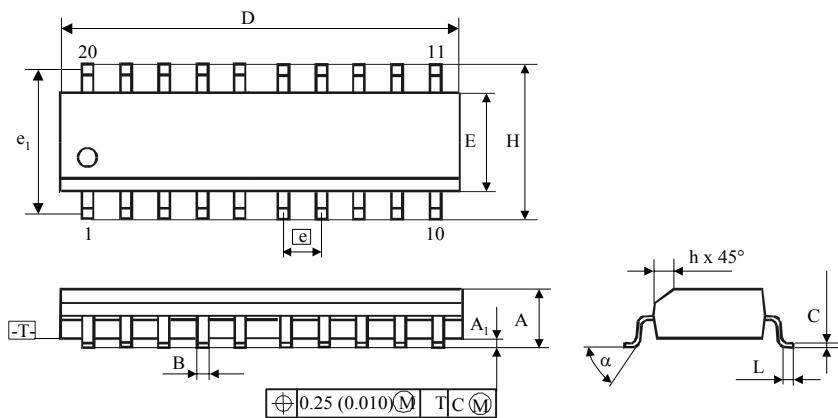

	A	A ₁	B	C	D	E	e	e ₁	H	h	L	α
	mm											°
min	2.35	0.10	0.33	0.23	12.60	7.40	1.27	9.53	10.00	0.25	0.40	0
max	2.65	0.30	0.51	0.32	13.00	7.60	(nom)	(nom)	10.65	0.75	1.27	8