

IN74VHC74D

DUAL D FLIP-FLOP WITH SET AND RESET


IN74VHC74D is high-speed logic IC made by CMOS technology and designed for use in high-performance calculating systems with a wide supply voltage range.

As for operation speed, IN74VHC74D can be compared with equivalent bipolar ICs based on Schottky TTL and two times surpasses ICs of IN74HC series.

IN74VHC74D tolerates operation under conditions when voltage on input is exceeded up to 7V without affecting characteristics and IC reliability. This possibility allows to use IN74VHC74D in radio-electronic devices for interfacing with supply voltages 5V and 3V, eliminate IC failure under supply voltage source emergency outage.

Use of output edge shaping block in the microcircuit allows to reduce noise amplitude of noises when switching outputs into the same state simultaneously.

Input and output levels of IN74VHC74D are compatible with CMOS levels



Features:

- Supply voltage range 2.0 to 5.5 V.
- Output current 8 mA.
- Low consumption current: 0.2 mA (typical value) at $T_a = 25^\circ\text{C}$.
- Latchup current not less than 300 mA at $T_a = 85^\circ\text{C}$.
- Tolerable value of static potential not less than 2000 V as per human body model (HBM) and not less than 200 V as per machine model (MM).
- Ambient operation temperature minus 40 to plus 85 °C.
- Balanced signal propagation delay.
- Ensures voltage exceeding mode on input
- Low noise level at the simultaneous switching of outputs in the same state: $V_{OLP} = 0.8$ V (max).
- For pins and functions, compatible with IN74HC74.


IN74VHC74D

IN74VHC74D truth table

Input				Output	
\overline{nSD}	\overline{nRD}	nCP	nD	nQ	\overline{nQ}
L	H	X	X	H	L
H	L	X	X	L	H
L	L	X	X	H	H
H	H	↑	H	H	L
H	H	↓	L	L	H
H	H	L	X	Qo	Qo
H	H	H	X	Qo	Qo
H	H	↑	X	Qo	Qo

Note – H - high voltage level;
 L – low voltage level;
 X - any voltage level (low or high);
 Qo - storage of the previous state;
 Z - output in the third
 ↑ - transition from low into high level;
 ↓ - transition from high into low level

Pinout

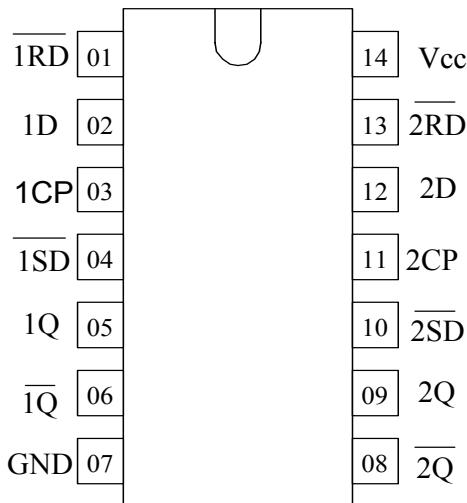

Pins description in IN74VHC74D

Pin No.	Symbol	Description
01	$\overline{1RD}$	Input of RESET signal
02	1D	Data input
03	$1CP$	Input of clock signal
04	$\overline{1SD}$	Input of SET signal
05	1Q	Data output
06	$\overline{1Q}$	Data output
07	GND	Common output
08	$\overline{2Q}$	Data output
09	2Q	Data output
10	$2SD$	Input of SET signal
11	$2CP$	Input of clock signal
12	2D	Data input
13	$\overline{2RD}$	Input of RESET signal
14	V _{CC}	Supply output from voltage source

IN74VHC74D

Absolute maximum conditions*

Parameter, unit	Symbol	Value	
		min	max
Supply voltage, V	V _{CC}	-0.5	7.0
Input voltage, V	V _{in}	-0.5	7.0
Output voltage, V	V _{out}	-0.5	V _{CC} +0.5V
Input diode current, mA	I _{IK}	—	-20
Current of common output and supply output, mA	I _{CC}	—	±50
Output current, mA	I _{OUT}	—	±25
Output diode current, mA	I _{OK}	—	±20
Dissipated power, mW	P _D	—	180

*Under absolute maximum conditions operation of microcircuit is not guaranteed.
Operation is guaranteed under maximum conditions

Maximum conditions

Parameter, unit	Symbol	Value	
		min	max
Supply voltage, V	V _{CC}	2.0	5.5
Input voltage, V	V _{in}	0	V _{CC}
Output voltage, V	V _{out}	0	V _{CC}
Output current, mA	I _{OUT}	—	±8.0
Input rise and fall time, ns/V at V _{CC} = (3.3 ± 0.3) V at V _{CC} = (5.0 ± 0.5) V	t _{LH} , t _{HL}	0 0	100 20

IN74VHC74D

DC electrical characteristics

Symbol	Parameter	Test conditions	V _{CC} , V	Value				Unit	
				25 °C		-40 to 85 °C			
				min	max	min	max		
V _{IH}	High input voltage	V _O ≤ 0.1 V or V _O ≥ V _{CC} - 0.1 V	2.0	1.5	-	1.5	-	V	
			3.0-5.5	0.7V _{CC}	-	0.7V _{CC}	-		
V _{IL}	Low input voltage	V _O ≤ 0.1 V or V _O ≥ V _{CC} - 0.1 V	2.0	-	0.5	-	0.5		
			3.0-5.5	-	0.3V _{CC}	-	0.3V _{CC}		
V _{OH}	High output voltage	V _I = V _{IH} or V _{IL} I _O = -50 μA	2.0	1.92	-	1.9	-		
			3.0	2.92	-	2.9	-		
			4.5	4.42	-	4.4	-		
			5.5	5.52	-	5.4	-		
		V _I = V _{IH} or V _{IL} ; I _O = -4 mA	3.0	2.58	-	2.48	-		
		V _I = V _{IH} or V _{IL} ; I _O = -8 mA	4.5	3.94	-	3.80	-		
V _{OL}	Low output voltage	V _I = V _{IH} or V _{IL} I _O = 50 μA	2.0	-	0.09	-	0.1		
			3.0	-	0.09	-	0.1		
			4.5	-	0.09	-	0.1		
			5.5	-	0.09	-	0.1		
		V _I = V _{IH} or V _{IL} I _O = 4 mA	3.0	-	0.36	-	0.44		
		V _I = V _{IH} or V _{IL} I _O = 8 mA	4.5	-	0.36	-	0.44		
I _I	Low level input current	V _I = 0 V	5.5		-0.1		-1.0	uA	
I _{IH}	High level input current	V _I = V _{CC}	5.5	-	0.1	-	1.0		
I _{IH1}	High level input current	V _I = 5.5V	0	-	0.1	-	1.0		
I _{CC}	Consumption current	V _I = V _{CC} or 0V	5.5	-	2.0	-	20.0		




IN74VHC74D

AC electrical characteristics ($t_{LH} = t_{HL} = 3.0$ ns)


Symbol	Parameter	Test conditions	V_{CC}, V	C_L, pF	Value				Unit	
					25 °C		−40 to 85 °C			
					min	max	min	max		
t_{PHL}, t_{PLH}	Propagation delay time when switching "on", "off" from input CP to outputs Q, \bar{Q}	$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.3 ± 0.3	15	—	11.9	—	14.0	ns	
				50	—	15.4	—	17.5		
t_{PHL}, t_{PLH}	Propagation delay time when switching "on", "off" from input CP to outputs Q, \bar{Q}	$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	5.0 ± 0.5	15	—	7.3	—	8.5	ns	
				50	—	8.3	—	10.5		
t_{PHL}, t_{PLH}	Propagation delay time when switching "on", "off" from inputs SD, RD to outputs Q, \bar{Q}	$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.3 ± 0.3	15	—	12.3	—	14.5	ns	
				50	—	15.8	—	18.0		
t_{PHL}, t_{PLH}	Propagation delay time when switching "on", "off" from inputs SD, RD to outputs Q, \bar{Q}	$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	5.0 ± 0.5	15	—	7.7	—	9.0	ns	
				50	—	9.7	—	11.0		
fmax	Maximum Frequency	Clock	$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.3 ± 0.5	15	—	80	—	70	MHz
					50	—	50	—	45	
fmax	Maximum Frequency	Clock	$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	5.0 ± 0.5	15	—	130	—	110	MHz
					50	—	90	—	75	
t _{SU}	Time of setting signal D to CP		$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.3 ± 0.3	15	6.0	—	7.0	—	ns
					50	5.0	—	5.0	—	
t _H	Retention time, D signal to CP		$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.0 ± 0.3	15	0.5	—	0.5	—	
					50	0.5	—	0.5	—	
t _{REM}	Time of recovery of signal CP after signals SD, RD		$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.0 ± 0.3	15	5.0	—	5.0	—	
					50	3.0	—	3.0	—	
t _w	Pulse duration of CP, SD, RD signals		$V_{IL} = 0$ V, $V_{IH} = V_{CC}$,	3.0 ± 0.3	15	6.0	—	7.0	—	pF
					50	5.0	—	6.0	—	
C _I	Input capacity	$V_I = 0$ V or V_{CC}		5.0			10			
C _{PD}	Dynamic capacity			5.0			50			

IN74VHC74D

- Time diagram of input and output pulses

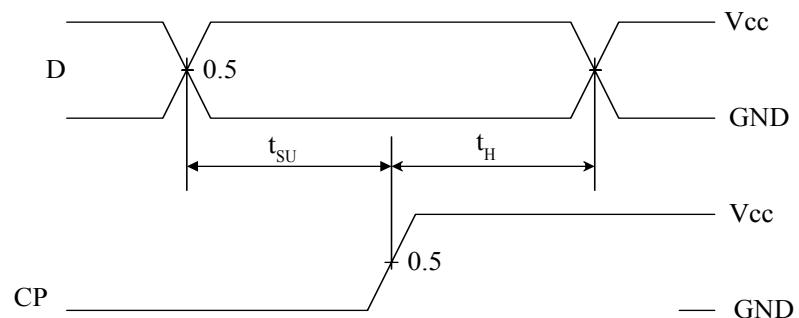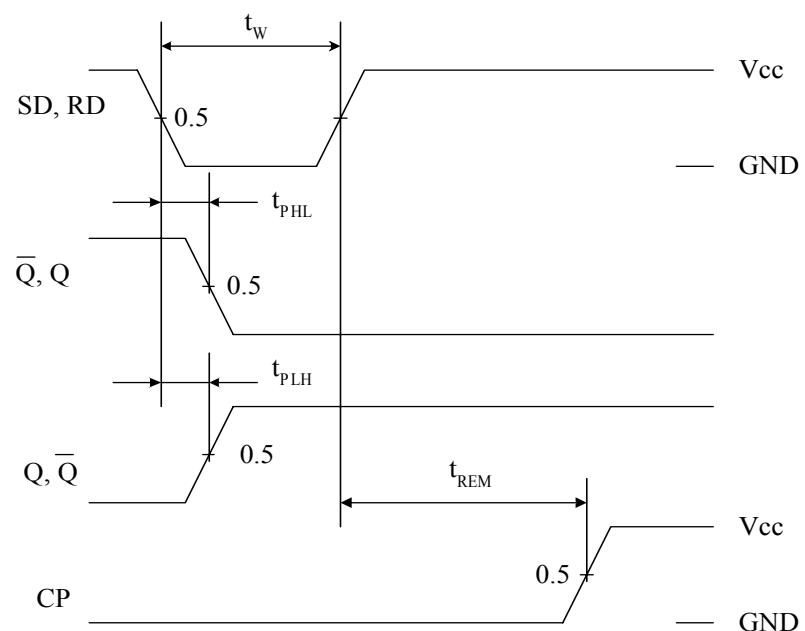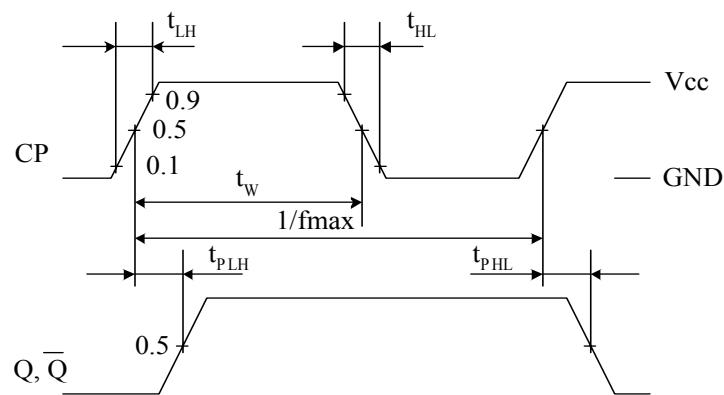

MS-012AB Package dimensions

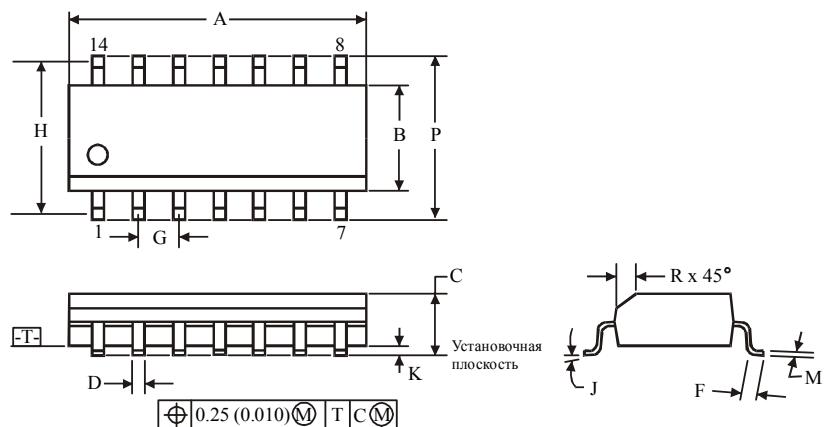

	Dimensions, mm	
	min	max
A	8.55	8.75
B	3.80	4.00
C	1.35	1.75
D	0.33	0.51
F	0.40	1.27
G	1.27	
H	5.72	
J	0°	8°
K	0.10	0.25
M	0.19	0.25
P	5.80	6.20
R	0.25	0.50