


**IW4001B**

## Quad 2-Input NOR Gate High-Voltage Silicon-Gate CMOS


The IW4001B NOR gates provide the system designer with direct implementation of the NOR function.

- Operating Voltage Range: 3.0 to 18 V
- Maximum input current of 1  $\mu$ A at 18 V over full package-temperature range; 100 nA at 18 V and 25°C
- Noise margin (over full package temperature range):
  - 0.5 V min @ 5.0 V supply
  - 1.0 V min @ 10.0 V supply
  - 1.5 V min @ 15.0 V supply

### LOGIC DIAGRAM

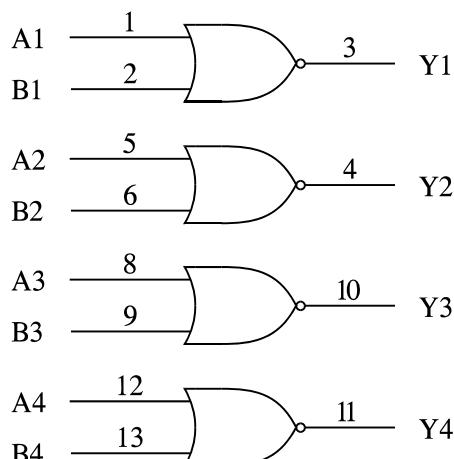

PIN 14 =V<sub>CC</sub>  
PIN 7 = GND



### ORDERING INFORMATION

IW4001BN Plastic

IW4001BD SOIC

IZ4001B CHIP

T<sub>A</sub> = -55° to 125° C for all packages

### PIN ASSIGNMENT

A1	1 ●	14	V <sub>CC</sub>
B1	2	13	B4
Y1	3	12	A4
Y2	4	11	Y4
A2	5	10	Y3
B2	6	9	B3
GND	7	8	A3

### FUNCTION TABLE

Inputs		Output
A	B	Y
L	L	H
L	H	L
H	L	L
H	H	L

L – LOW voltage level

H – HIGH voltage level

**MAXIMUM RATINGS\***

Symbol	Parameter	Value	Unit
V <sub>CC</sub>	DC Supply Voltage (Referenced to GND)	-0.5 to +20	V
V <sub>IN</sub>	DC Input Voltage (Referenced to GND)	-0.5 to V <sub>CC</sub> +0.5	V
I <sub>IN</sub>	DC Input Current, per Pin	±10	mA
P <sub>D</sub>	Power Dissipation in Still Air, Plastic DIP + SOIC Package +	500 500	mW
P <sub>TOT</sub>	Power Dissipation per Output Transistor	100	mW
T <sub>STG</sub>	Storage Temperature	-65 to +150	°C
T <sub>L</sub>	Lead Temperature, 1 mm from Case for 10 Seconds (Plastic DIP or SOIC Package)	260	°C

\*Maximum Ratings are those values beyond which damage to the device may occur.

Functional operation should be restricted to the Recommended Operating Conditions.

+Derating - Plastic DIP: - 12 mW/°C from 100° to 125°C

SOIC Package: : - 7 mW/°C from 65° to 125°C

**RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	DC Supply Voltage (Referenced to GND)	3.0	18	V
V <sub>IN</sub> , V <sub>OUT</sub>	DC Input Voltage, Output Voltage (Referenced to GND)	0	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature, All Package Types	-55	+125	°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V<sub>IN</sub> and V<sub>OUT</sub> should be constrained to the range GND≤(V<sub>IN</sub> or V<sub>OUT</sub>)≤V<sub>CC</sub>.



Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V<sub>CC</sub>). Unused outputs must be left open.

**DC ELECTRICAL CHARACTERISTICS**(Voltages Referenced to GND)


Symbol	Parameter	Test Conditions	Vcc V	Guaranteed Limit			Unit
				≥-55°C	25°C	≤125 °C	
V <sub>IH</sub>	Minimum High-Level Input Voltage	V <sub>OUT</sub> =0.5V	5.0	3.5	3.5	3.5	V
		V <sub>OUT</sub> =1.0 V	10	7	7	7	
		V <sub>OUT</sub> =1.5V	15	11	11	11	
V <sub>IL</sub>	Maximum Low - Level Input Voltage	V <sub>OUT</sub> =0.5 V or V <sub>CC</sub> - 0.5 V	5.0	1.5	1.5	1.5	V
		V <sub>OUT</sub> =1.0 V or V <sub>CC</sub> - 1.0 V	10	3	3	3	
		V <sub>OUT</sub> =1.5 V or V <sub>CC</sub> - 1.5 V	15	4	4	4	
V <sub>OH</sub>	Minimum High-Level Output Voltage	V <sub>IN</sub> =GND	5.0	4.95	4.95	4.95	V
			10	9.95	9.95	9.95	
			15	14.95	14.95	14.95	
V <sub>OOL</sub>	Maximum Low-Level Output Voltage	V <sub>IN</sub> =GND or V <sub>CC</sub>	5.0	0.05	0.05	0.05	V
			10	0.05	0.05	0.05	
			15	0.05	0.05	0.05	
I <sub>IN</sub>	Maximum Input Leakage Current	V <sub>IN</sub> = GND or V <sub>CC</sub>	18	±0.1	±0.1	±1.0	µA
I <sub>CC</sub>	Maximum Quiescent Supply Current (per Package)	V <sub>IN</sub> = GND or V <sub>CC</sub>	5.0	0.25	0.25	7.5	µA
			10	0.5	0.5	15	
			15	1.0	1.0	30	
			20	5.0	5.0	150	
I <sub>OOL</sub>	Minimum Output Low (Sink) Current	V <sub>IN</sub> = GND or V <sub>CC</sub> U <sub>OOL</sub> =0.4 V U <sub>OOL</sub> =0.5 V U <sub>OOL</sub> =1.5 V	5.0	0.64	0.51	0.36	mA
			10	1.6	1.3	0.9	
			15	4.2	3.4	2.4	
I <sub>OIH</sub>	Minimum Output High (Source) Current	V <sub>IN</sub> = GND or V <sub>CC</sub> U <sub>OIH</sub> =2.5 V U <sub>OIH</sub> =4.6 V U <sub>OIH</sub> =9.5 V U <sub>OIH</sub> =13.5 V	5.0	-2.0	-1.6	-1.15	mA
			5.0	-0.64	-0.51	-0.36	
			10	-1.6	-1.3	-0.9	
			15	-4.2	-3.4	-2.4	

**AC ELECTRICAL CHARACTERISTICS**( $C_L=50\text{pF}$ ,  $R_L=200\text{k}\Omega$ , Input  $t_r=t_f=20\text{ ns}$ )

Symbol	Parameter	V <sub>CC</sub> V	Guaranteed Limit			Unit
			≥-55°C	25°C	≤125°C	
t <sub>PLH</sub> , t <sub>PHL</sub>	Maximum Propagation Delay, Input A or B to Output Y (Figure 1)	5.0	250	250	250	ns
		10	120	120	120	
		15	90	90	90	
t <sub>TLH</sub> , t <sub>THL</sub>	Maximum Output Transition Time, Any Output (Figure 1)	5.0	200	200	200	ns
		10	100	100	100	
		15	80	80	80	
C <sub>IN</sub>	Maximum Input Capacitance	-		7.5		pF

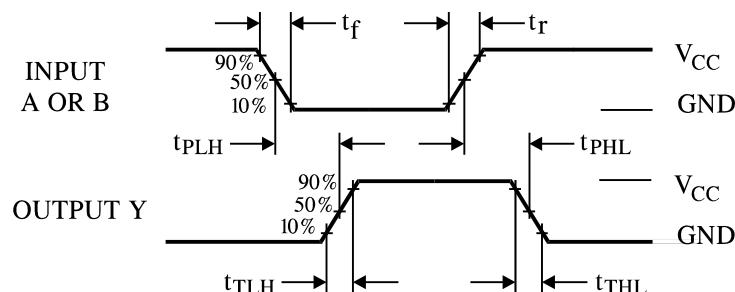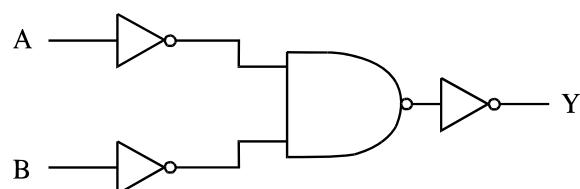**Figure 1. Switching Waveforms****EXPANDED LOGIC DIAGRAM  
(1/4 of the Device)**

## CHIP PAD DIAGRAM

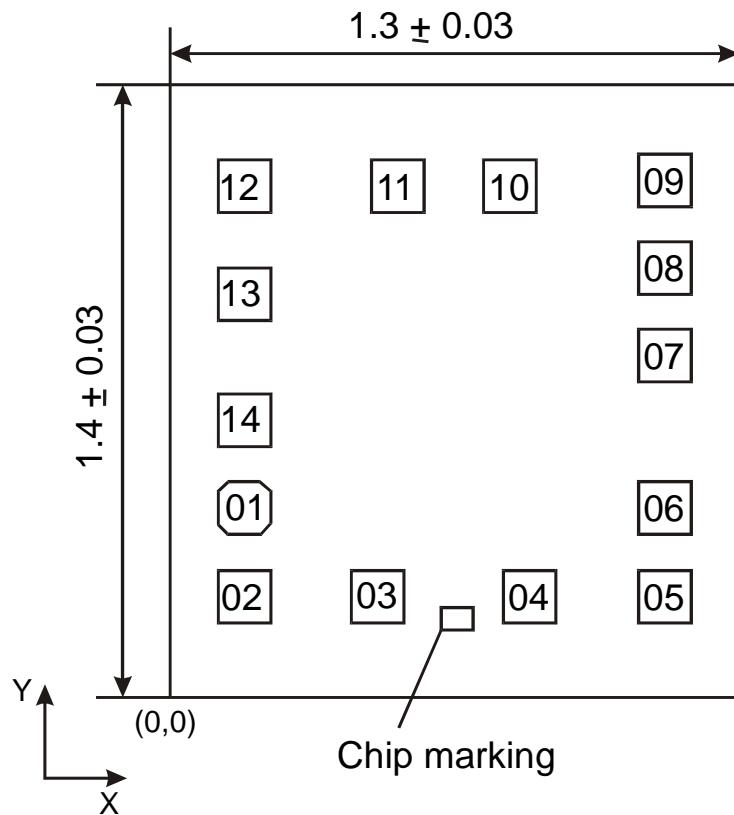

**Chip marking: 400115**

**Location of marking (mm):** left lower corner  $x = 0.619$ ,  $y = 0.154$

**Chip thickness:**  $0.46 \pm 0.02$  MM

## PAD LOCATION

Chip thickness	Symbol	Location (left lower corner), mm		Pad size, mm
		X	Y	
01	A1	0.110	0.373	$0.120 \times 0.120$
02	B1	0.110	0.170	$0.120 \times 0.120$
03	Y1	0.414	0.170	$0.120 \times 0.120$
04	Y2	0.761	0.170	$0.120 \times 0.120$
05	A2	1.070	0.170	$0.120 \times 0.120$
06	B2	1.070	0.373	$0.120 \times 0.120$
07	GND	1.070	0.721	$0.120 \times 0.120$
08	A3	1.070	0.921	$0.120 \times 0.120$
09	B3	1.070	1.121	$0.120 \times 0.120$
10	Y3	0.716	1.108	$0.120 \times 0.120$
11	Y4	0.460	1.108	$0.120 \times 0.120$
12	A4	0.110	1.108	$0.120 \times 0.120$
13	B4	0.110	0.861	$0.120 \times 0.120$
14	Vcc	0.110	0.573	$0.120 \times 0.120$

Note: Location is given as per passivation layer

